

## Features

The FS5620J represents the premium level of data collection devices. Using advanced 2D imaging technology, FS5620J 2D stationary barcode reader provides a solution for OEM use into self-service kiosks, price checker, ticket readers, document handling, as well as vending machines.

- \* Omni-directional reading
- \* 1D / 2D Imager capture capability.
- \* Interface options: USB HID
- \* Integrated good-read beeper & LED indicator
- \* Presentation mode
- \* Applications: QR code reader on desk;  
Hands-free Barcode Scanner with stand  
Install into KIOSK, Self-service device




## Scanners Specifications :

Model Name	<b>FS5620J</b>
Description	Stationary 2D barcode scanner
Engine	2D engine
Scan Mode	Presentation mode

## Performance Characteristics

• Light source	White LED
• Scan speed	60 frame /sec
• Depth of field	13 mil UPCA : 280 mm 20 mil QR code : 220mm
• Sensor	CMOS (640×480 pixels)
• Best resolution	1D (4mil): Code 39
• Indicators	LED & Beeper
• Print contrast	≥ 30% or more
• Symbolologies	1D: Code 128, EAN-13, EAN-8, Code 39, Code 32, UPC-A, UPC-E, Codabar, Interleaved 2 of 5, Industrial 2 of 5, Matrix 2 of 5, ISBN/ISSN, Code 93, GS1-128, GS1 Databar, GS1 Databar Limited, GS1 Databar Expanded 2D: PDF417, QR Code, Micro QR Code, Data Matrix, Aztec
• Interface	USB HID, USB Serial (by request)

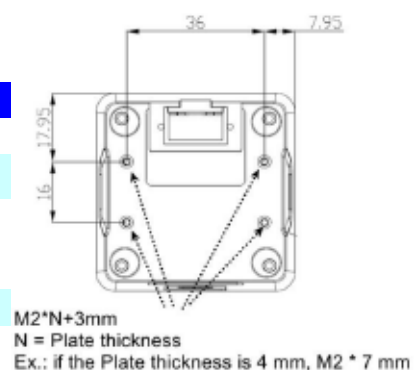

## Electrical Characteristics

• Input voltage	5 V/DC ± 5%
• Current - operating	190 mA max

## Physical Characteristics

• Dimension (L x W x H)	52 X 52 X 50 mm
• Weight	102 g +/- 5 g (with Cable No stand)

## Environment

• Temperature-operation	-0°C to 50°C
• Temperature-storage	-10°C to 60°C
• Humidity-operation	5% to 95% relative humidity, non-condensing
• Ambient Light	0-100,000 lux max
• Shock	1 M drop

**Decode Zone** (DOF is measured at the office under 600 lux and by Standard barcode. There are +/- 10 mm Torrence. DOF may be also impacted by barcode quality and environmental conditions. )

• 5 mil Code 39	10 ~ 100 mm
• 13 mil UPCA	20 ~ 200 mm
• 10 mil DataMatrix	10 ~ 135 mm
• 20 mil QR code	0 ~ 200 mm

Product specification is subject to change without notice.